

# MODULYS

Scalable and flexible modular solution  
from 1.5 to 24 kVA



## The solution for

- > e.business
- > Server farms
- > Telecommunications
- > Medical
- > Computer networks

## Technology

- > VFI "online double conversion"

## Range description and features

Upgradable over time

- MODULYS adapts easily to changes and to the growth of your system. Power modules of 1.5, 3, 4.5 and 6 kVA, in tower, rack and system versions are easily combined to ensure the ideal configuration.

## Total protection

- MODULYS is a modular UPS. The number of Mod-Power and Mod-Battery units can easily be increased to provide redundant operation, from N + 1 to N + X. In this way, total availability of the system is achieved, even if one or more modules are inoperative.

## Continuous protection

- MODULYS has "hot swap" power and back-up modules which can be replaced or inserted while the system is in operation. In this way, true continuity of power supplied to the load is achieved, without any interruption of service.

## Organisation of your future needs

- MODULYS modular design allows the number of modules to be increased and therefore, the power and back-up time of your UPS to grow. In this way you can easily cope with future situations which you are not able to predict today.

## Working space

- MODULYS is the most compact UPS in its category. Whether in stand- alone version or one of the many system configurations, the installation takes up very little of your working area.

## "No Single Point of Failure" solutions




- Each power module has its own integrated controller and an automatic bypass. In the system version, this design provides an additional guarantee since the load will be powered even if one of the modules is not working.

## Range

**Mod-RM** expandable from 1.5 to 9 kVA

**Mod-MC** expandable from 1.5 to 24 kVA

**Mod-EB** expandable from 9 to 24 kVA



Model	RM 315	RM 330	MC 415	MC 430	MC 645	MC 660	MC 660 SIX	MC 960	MC 990 SIX	MC 912 SIX	EB1290	EB 1212 SIX
Mod-Power	1 x 1500 VA	1 x 3000 VA	1 x 1500 VA	1 x 3000 VA	1 x 4500 VA	2 x 3000 VA	1 x 6000 VA	2 x 3000 VA	2 x 4500 VA	2 x 6000 VA	2 x 4500 VA	2 x 6000 VA
Battery pack	1	2	1	2	3	4	4	4	6	8	6	8

## Standard electrical features

- Separate bypass input.
- 4 dry contacts relay card.

## Electrical options

- Temperature sensor.

## Standard communication features

- 2 slots for communication options.
- MODBUS RTU (RS232).
- LOCAL VIEW software for local UPS monitoring and shutdown for Windows, Linux and MAC Osx.

## Technical data


MODULYS	
Mod-Power	
Sn [VA]	1500      3000      4500      6000
Pn [W]	1050      2100      3150      4200
Input/output	1/1      1/1, 3/1
INPUT	
Rated voltage	230 V (1ph)      230 V (1ph + N) or 400 V (3ph + N)
Voltage tolerance	± 20% (up to -30% at 70% nominal load)
Rated frequency	50/60 Hz
Frequency tolerance	± 10%
Power factor	> 0.99
OUTPUT	
Rated voltage	230 V (1ph + N)
Voltage tolerance	± 3% (can be set 208/220/240 V)
Rated frequency	50/60 Hz
Frequency tolerance	± 2% (± 0.1% autonomous frequency)
Overload	110% for 1 minute, 130% for 10 seconds, 200% for 5 cycles
Crest factor	3:1
BYPASS	
Rated voltage	voltage selected
Voltage tolerance	± 15%
Rated frequency	frequency selected
Frequency tolerance	± 2%
EFFICIENCY	
Online mode	up to 91%
Eco Mode	97%
ENVIRONMENT	
Operating ambient temperature	0 °C to + 40 °C (15 °C to 25 °C for best battery life)
Relative humidity	0% - 90% without condensation
Maximum altitude (above sea level)	1000 m without de-rating (maximum 3000 m)
<b>Mod-System MODULYS MC</b>	
Mod-MC 4XX - 4 slots W x D x H	550 x 625 x 760 mm
Mod-MC 6XX - 6 slots W x D x H	550 x 625 x 1026 mm
Mod-MC 9XX - 9 slots W x D x H	550 x 625 x 1425 mm
Weight	depending on the configuration
Degree of protection	IP20
Acoustic level at 1 m (ISO 3746)	< 52 dBA (Mod-MC 4XX)      < 60 dBA (Mod-MC 6XX and Mod-MC 9XX)
Heat dissipation	530 W (Mod-MC 4XX)      700 W (Mod-MC 6XX)      2090 W (Mod-MC 9XX)
Connections	terminals
STANDARDS	
Safety	IEC/EN 62040-1, AS 62040.1.1, AS 62040.1.2
EMC	IEC/EN 62040-2, AS 62040.2
Performance	IEC/EN 62040-3, AS 62040.3
Product declaration	CE, RoHS (E2376)

## Communication options


- Dry-contact interface (configurable voltage-free contacts).
- NET VISION: professional WEB/SNMP Ethernet interface for secure UPS monitoring and remote automatic shutdown.
- REMOTE VIEW PRO supervision software.
- Remote mimic panel.

## An adaptable system


### Mod-RM

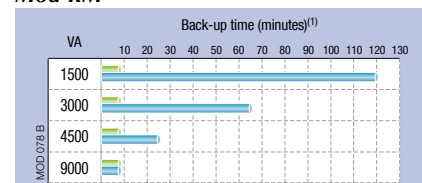

### Mod-MC

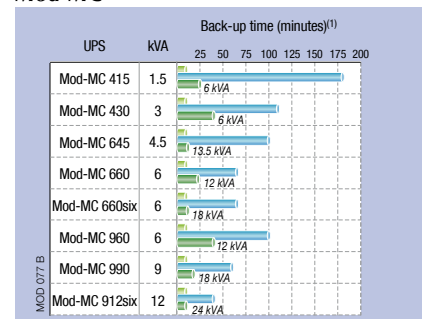

### Mod-EB

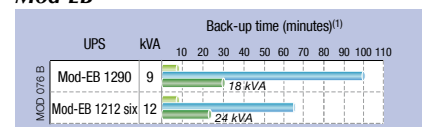

Legend: Standard (1) Max BUT @ 75% load, Maximum, Expandable